



Lexan® Hardcoated Polycarbonate
 VStream® Windscreen
 N20057, Short Dark Tint
 N20058, Mid Light Tint
 N20059, Tall Clear
 For Honda Africa Twin

Thank you for purchasing a National Cycle product. Read these instructions carefully and thoroughly before beginning work. Dealers, if installing this windscreen for a customer, please give them this manual. It contains information needed to properly maintain and use this product.



Attention:

Special notes and cautionary measures which can prevent damage to the accessory or motorcycle.



Note:

Tips for facilitation of operation, control and adjustment, as well as maintenance work.

CONTENTS OF KIT

Item	Description	Part No.	Qty.	Notes and Tools
1	VStream® Windscreen		1	All Stock Hardware Will Be Re-used



TOOLS

5mm Hex Key



Do Not Remove Lower Screws!

Figure 1

PREPARATION

1. Place motorcycle securely on its side stand.



INSTALLATION

 All stock hardware will be reused.

1. Remove the upper two Allen Screws and washers. Wellnuts will remain in the brackets. (5mm Hex Key) Figure 1



Figure 2

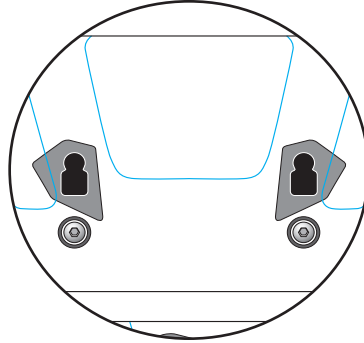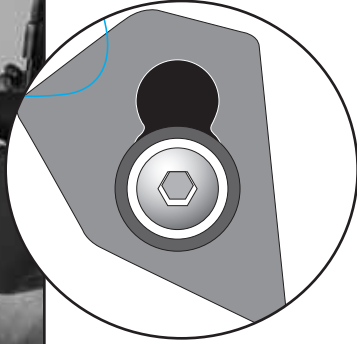

INSTALLATION

2. Loosen, but Do Not remove the lower two allen screws. **(5mm Hex Key) Figure 2**
3. Slide the shield downwards until it bottoms out, then pull the shield off the bracket. Figure 2



Figure 3






Figure 4

4. Remove the wellnuts, screws and washers from the lower two screw holes. **(5mm Hex Key) Figure 3**
5. Reinstall the wellnuts, screws and washers onto the VStream Windshield. **(5mm Hex Key) Figure 4**



Figure 5

6. Insert the lower two wellnuts into the bracket, push shield onto bracket.

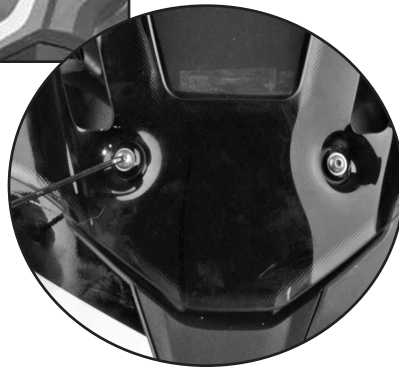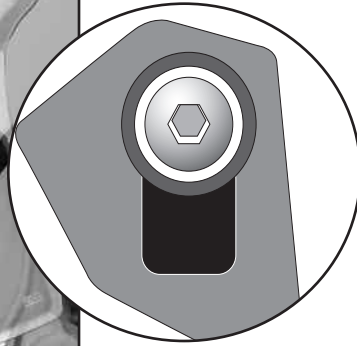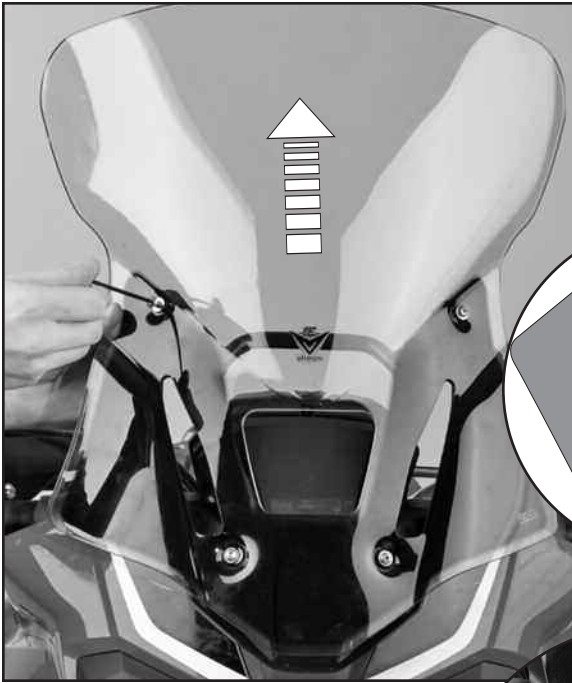

INSTALLATION

7. Push Shield upwards until it stops. While holding the wellnut from behind the bracket, reinstall the upper screws and washers. Tighten screws firmly, but do not over tighten. **(5mm Hex Key) Figure 6**

8. Tighten the lower two screws firmly. Do not overtighten. **(5mm Hex Key) Figure 6**



Enjoy your new VStream® Windshield

CLEANING AND MAINTENANCE To clean the screen, wash with a clean soft cloth, plenty of warm water and if necessary, a non-abrasive soap such as dishwashing liquid. Flannel or soft chamois make good cleaning cloths. **Paint, glue residue or grease removal:** Moisten cotton with naphtha or turpentine followed by a wash as above. National Cycle **Shield Wash™** (N1401-01) makes a good daily cleaner and comes with a handy travel size bottle. Shield Wash is safe for all windshields and helmet visors.

Do not clean polycarbonate in hot sun or high temperatures. Do not clean the screen with glass cleaners.

Do not allow brake fluid, alcohol, or strong solvents to contact the screen.

RAIN REPELLENT Do not use rain protective products made for glass. We recommend National Cycle's **RainZip®** (N1410-01) to keep your windscreen clear in rainy weather.

WARNING

Fahren Sie Ihr Motorrad niemals mit losen Zubehörteilen. Überprüfen Sie die Halterungen regelmäßig auf festen Sitz.

Die heutigen Motorräder sind mit einer ausreichenden Rahmensteifigkeit gebaut, um den moderaten Belastungen standzuhalten, die durch die absehbare Hinzufügung eines oder mehrerer Zubehörteile auf sie ausgeübt werden. Wenn ein oder mehrere Zubehörteile die Stabilität Ihres Motorrads beeinträchtigen, entfernen Sie sofort das / die Zubehörteil (e). Nehmen Sie kein Motorrad in Betrieb, das unsichere Fahreigenschaften aufweist.

Lassen Sie das Problem von erfahrenem Servicepersonal beheben, bevor Sie mit installiertem Zubehör fahren. Bei weiteren Fragen zu Handhabungsproblemen im Zusammenhang mit einem oder mehreren Zubehörteilen wenden Sie sich bitte an Ihren Händler, Motorradhersteller oder Zubehörhersteller.

Sonnenlicht, das von der inneren Krümmung der Windschutzscheibe reflektiert wird, kann zu bestimmten Tageszeiten zu einem extremen Wärmestau auf den Instrumenten des Motorrads führen und diese möglicherweise sogar zum Schmelzen bringen. Gehen Sie beim Parken vorsichtig vor, um dies zu vermeiden. Stellen Sie Ihr Motorrad in Richtung Sonne ab oder platzieren Sie einen undurchsichtigen Gegenstand über diesem Bereich.

National Cycle, Inc. PO Box 158 Maywood, IL 60153-0158 USA

708-343-0400 / Fax: 708-343-0625 / www.nationalcycle.com / e-mail: info@nationalcycle.com